



GE Consumer & Industrial
Lighting

Commercial Products & Solutions

[SITE SEARCH](#)

[HOME](#)

[PRODUCTS](#)

[EDUCATION / RESOURCES](#)

[LIGHTING APPLICATIONS](#)

[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)

45664 – MVR400/VBU/HO/PA

GE High Output Multi-Vapor® PulseArc® Quartz Metal Halide ED37




GENERAL CHARACTERISTICS

Lamp type	High Intensity Discharge - Quartz Metal Halide
Bulb	ED37
Base	Mogul Screw (E39)
Bulb Finish	Clear
Wattage	400
Rated Life	20000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open Fixture-Restricted Position (S-Rated)
Additional Info	High output



Bulb

Base



[View Larger](#)

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	41000
Mean Lumens	31000
Nominal Initial Lumens per Watt	102
Color Temperature	4000 K
Color Rendering Index (CRI)	65
Effective Arc Length	1.771650 in (44.999910 mm)

ELECTRICAL CHARACTERISTICS

Burn Position	Vertical base up $\pm 15^\circ$
Open Circuit Voltage (peak lead ballast) (MIN)	400 V/400
Open Circuit Voltage (RMS lag ballast) (MIN)	220 V
Warm Up Time to 90% (MIN)	2 min
Warm Up Time to 90% (MAX)	5 min
Hot Restart Time to 90% (MIN)	10 min
Hot Restart Time to 90% (MAX)	15 min

DIMENSIONS

Maximum Overall Length (MOL)	11.5000 in (292.1 mm)
Nominal Length	11.500 in (292.1 mm)
Bulb Diameter (DIA)	4.625 in (117.4 mm)
Light Center Length (LCL)	7.000 in (177.8 mm)

ADDITIONAL RESOURCES

Catalogs

Testimonials

Brochures

Application/Segment Brochures

- [Contractor Lighting](#)
- [Retail Lighting](#)

Product Brochures


- [HID Lamps](#)
- [Industrial Lighting](#)
- [Metal Halide Lamps](#)
- [PulseArc MV](#)

MSDS (Material Safety Data Sheets)

Disposal Policies & Recycling Information

GRAPHS & CHARTS

Spectral Power Distribution

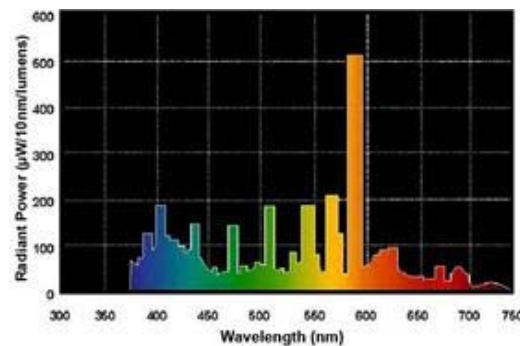

PRODUCT INFORMATION

Product Code	45664
Description	MVR400/VBU/HO/PA
ANSI Code	M135/M155
Standard Package	Case
Standard Package GTIN	10043168456644
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168456647

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
29377	GE-MH-250-400-MA	1	99.0	1.0
87008	P400MLTAC4M500K	1	90.0	1.0
86999	P40048TAC4M500K	1	90.0	1.0

⚠ CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information: <http://www.fda.gov/cdrh/radhlth/urburns.html>

[See list of cautions & warnings.](#)

NOTES

- When operated on a 120 hrs. cycle (minimum), lamp life rating may be extended by up to 50% based on engineering estimates.

[Return To Top](#)